

Air Flow Company, Inc.

850 W. Fullerton Ave. • Addison, IL 60101
Tel (630) 628-1138 Fax (630) 628-1149

EA-301i

3" Deep Extruded Aluminum Inverted Blade Louver



Standard Louver Construction

✓ Frame	Frameless
✓ Blades Thickness	.081" extruded aluminum 6063-T5
✓ Blade Positioning	35° angle with 3- 1/8" spacing center to center
✓ Fasteners	3/16" plated steel screw
✓ Support	2 x 2 x 3/16" aluminum angle
✓ Finish	Mill
✓ Undersized	1/4" under opening sizes
✓ Mullions	Invisible
✓ Minimum Size	12" x 12"
✓ Maximum Single Section	120" x 84" or 84" x 120


Optional Construction

Frame	Channel .081" extruded aluminum 6063-T5		
Fasteners	Welded Construction		
	Stainless Steel Fasteners		
Screen	.050" x 3/4" expanded Frameless		
	.063" x 1/2" wire mesh Bird Screen		
Finish	18 x 16 Insect screen		
	Prime coat		
	Baked enamel		
	Powder coat		
	Kynar 500	2 Coat	3 Coat
Mullions	Anodized	Clear	Color
	Visible		
Frame Accessories	Flange		
	Pan		
	Extended sill		


Exterior Side

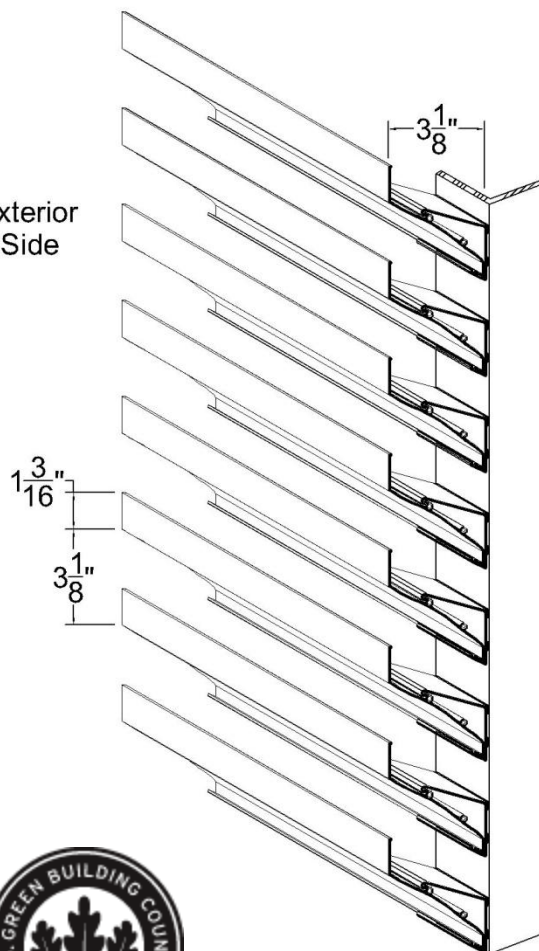


Mitered Corner



Post Corner



Invisible Mullion



Exposed Mullion

Louver Schedule

Item	Qty	Opening Size (W x H)	Notes	Project:	
				Location:	
				Arch/Eng:	
				Customer:	