
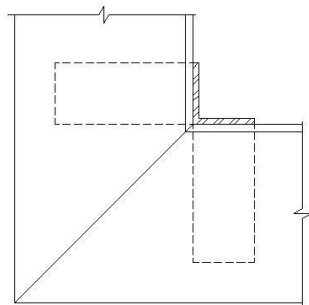


Standard Louver Construction


✓ Frame	Frameless
✓ Blades Thickness	.081" extruded aluminum 6063-T5
✓ Corners	Post
✓ Support	2 x 2 x 3/16" extruded aluminum
✓ Fasteners	3/16" plated steel screw
✓ Finish	Mill
✓ Undersized	1/4" under opening sizes
✓ Mullions	Invisible
✓ Free Area (48" x 48")	78%
✓ Minimum Size	12" x 12"
✓ Maximum Single Section	120" x 84" or 84" x 120

Optional Construction


Frames	Channel .081" extruded aluminum 6063-T5		
	Channel .125" extruded aluminum 6063-T5		
Blade	Inverted		
Blades Thickness	.125" extruded aluminum 6063-T5		
Support	2 x 2 x 1/4" extruded aluminum		
Fasteners	Welded Construction		
	Stainless Steel Fasteners		
Screen	.050" x 3/4" expanded aluminum		
	.063" x 1/2" wire mesh Bird Screen		
	18 x 16 Insect screen		
Finish	Prime coat		
	Baked enamel		
	Powder coat		
	Kynar 500	2 Coat	3 Coat
	Anodized	Clear	Color
Mullions	Visible		
Frame Accessories	Flange		
	Pan		
	Extended sill		
Corners	Mitered		

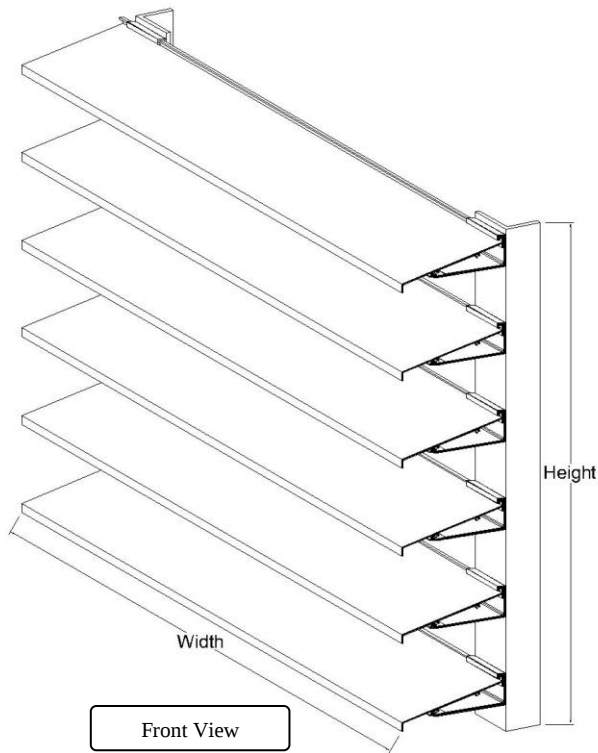


Mitered Corner



Post Corner

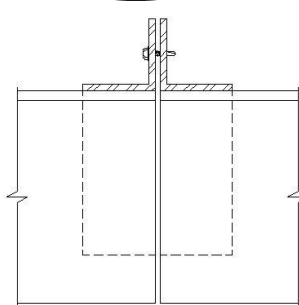

Invisible Mullion

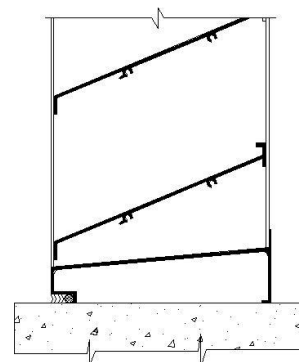

Channel Frame

Louver Schedule

Item	Qty	Opening Size (W x H)	Notes	Project:	
				Location:	
				Arch/Eng:	
				Customer:	