


Standard Louver Construction


✓ Frame	Frameless
✓ Blades Thickness	.081" extruded aluminum 6063-T5
✓ Blade Positioning	90° angle with 4 1/4" spacing center to center
✓ Support	2" x 2" x 3/16" extruded Aluminum angle
✓ Finish	Mill
✓ Undersized	1/4" under opening sizes
✓ Mullions	Invisible
✓ Minimum Size	12" x 12"
✓ Maximum Single Section	120" x 84" or 84" x 120"

Optional Construction

Frames	Channel .081" extruded aluminum 6063-T5
Fasteners	Welded Construction Stainless Steel Fasteners
Screen	.050" x 3/4" expanded aluminum .063" x 1/2" wire mesh Bird Screen 18 x 16 Insect screen Insect Screen
Finish	Prime coat Baked enamel Powder coat Kynar 500 2 Coat 3 Coat Anodized Clear Color
Frame Accessories	Pan Extended sill Filter racks Security bar

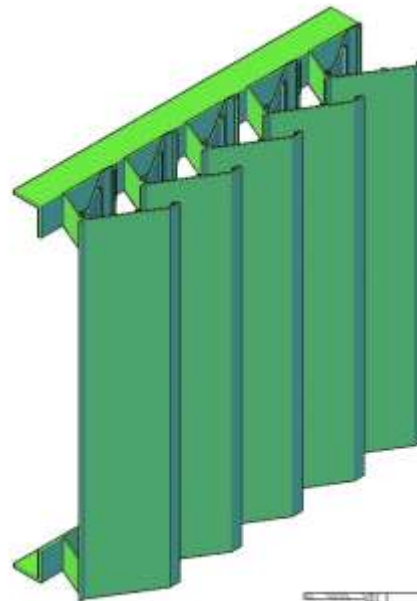

Horizontal view

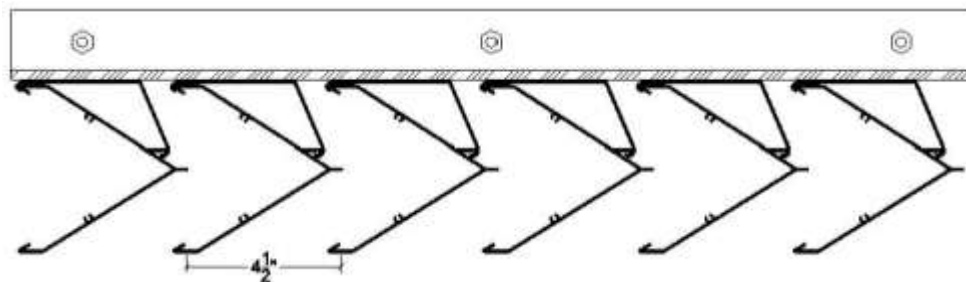

Plan view



Vertical

Louver Schedule

Item	Qty	Opening Size (W x H)	Notes	Project:	
				Location:	
				Arch/Eng:	
				Customer:	